

## TEST RESULTS

THERMAL INFORMATION	
DESCRIPTION	RESULTS
U-VALUE	2.84 W/m²K
SHGC	0.60
DESIGN WINDLOAD	2500 PA
25mm DOUBLE GLAZING IGU	

TEST PERFORMANCE RESULTS	
DESCRIPTION	RESULTS
NEGATIVE PRESSURE	2500 PA
POSITIVE PRESSURE	2500 PA
WATER PENETRATION	500 PA
STRUCTURAL	3750 PA

\*Test results were achieved based on a specific design configuration and size and may differ for other configurations and sizes.

## APPLICATIONS

CREALCO				
curtain wall	HOME	MANSSION	MALL	TOWER
Facade 60 curtain wall system			✓	✓

Crealco product range is available from the following Wispeco Appointed Stockists:



This brochure must be read in conjunction with the Installation, Cleaning & Maintenance Guidelines and Performance Certificates for the relevant system. The Manuals must also be used in conjunction with the design and cutting lists from the latest version of Starfront.



The Crealco Façade 60 curtain wall system is the latest cutting-edge product to be added to the Crealco product range. The Crealco Façade 60 is a remarkable, high-performance curtain wall system, providing manufacturers the flexibility to fabricate high-performance building solutions.

The Façade 60 is uniquely designed for the South African market, with outstanding thermal efficiency properties.

## FEATURES

- Thermally efficient, thus reducing building costs
- Accommodates window and door inserts
- Designed for easy manufacturing
- All aluminium and hardware components are locally available
- Minimal machining required, due to pre-punched profiles
- Unique mullion jig to fit transoms

## GLAZING

- Designed for both single and double glazing combinations
- Can accommodate up to 10.38 mm for single glazing

## GASKET & SEALS

- Locally available
- Inflex (EPDM equivalent)
- Only 3 gaskets required for both single and double glazing

## FINISH

- Both standard and non-standard colours available (SABS approved)
- Anodised (15 Mic) for inland
- Anodised (25 Mic) for coastal

## HARDWARE

- Minimal fittings and hardware required
- Locally available
- Stainless steel fixings


Exciting new hardware component - Spigot Clamp



## TYPICAL CONFIGURATIONS



Front view  
of the system

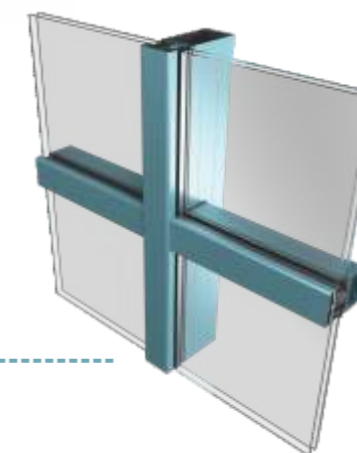

Rear view  
of the system



This brochure must be read in conjunction with the Installation, Cleaning & Maintenance Guidelines and Performance Certificates for the relevant system. The Manuals must also be used in conjunction with the design and cutting lists from the latest version of Starfront.

This brochure must be read in conjunction with the Installation, Cleaning & Maintenance Guidelines and Performance Certificates for the relevant system. The Manuals must also be used in conjunction with the design and cutting lists from the latest version of Starfront.